


775 Soft Amber Key 2

[View on leefilters.com](http://leefilters.com) / [Find a Dealer](#)


Used for producing a warm key light colour. Flame retardant.

	Source C 6774K	Tungsten 3200K
Transmission Y	58.4%	63.9%
x	0.409	0.509
y	0.363	0.403
Stop Value	1	$\frac{2}{3}$

Light transmitted (Y%)
for each colour
wavelength (nm)

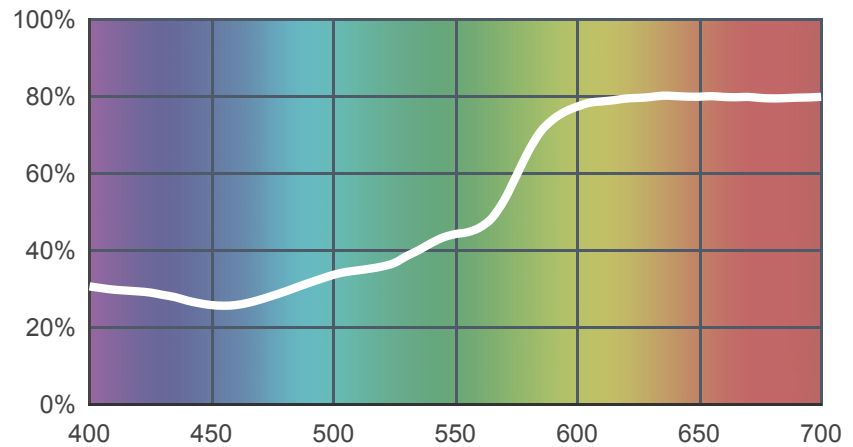

Dimming Source Preview

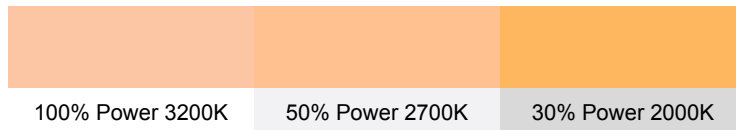

Created by **Jakob Holst** as a part of The Designer Series.

Rolls:

- **1" Core** 7.62m x 1.22m (25' x 48")
- **2" Core** 7.62m x 1.22m (25' x 48")
- **Quick Roll** Length 7.62m (25') x any width between 2.5cm - 1.17m (1" x 48")

Sheets:

- **Full Sheet** 1.22m x 0.53m (48" x 21")
USA: Full Sheets by special order only.
- **Half Sheet** 0.61m x 0.53m (24" x 21")

Pre-Cut Packs:

- **Quick Location Pack**
- **Master Location Pack**
- **Cosmetic Pack**

LEE Filters